



(33) 2300-3144 al 47
 (33) 3255-0120
 ventas@fbcfittings.com
 www.conexionespvc.com

TUBO PVC AZUL RIEGO PIP C/A



Tubo PVC Inglés Riego PIP Azul C/A, CL-100

100 psi / 7 Kg/cm2

Código	Medida	Precio Lista
PIP100-6C-20	6"	1,262.15
PIP100-8C-20	8"	2,184.37
PIP100-10C-20	10"	3,481.68
PIP100-12C-20	12"	4,871.08
PIP100-15C-20	15"	7,681.36

* Tramos de 6.1 mts - Precio por Tramo

Tubo PVC Inglés Riego PIP Azul C/A, CL-80

80 psi / 5 Kg/cm2

Código	Medida	Precio Lista
PIP80-6C-20	6"	1,048.59
PIP80-8C-20	8"	1,809.98
PIP80-10C-20	10"	2,841.33
PIP80-12C-20	12"	4,025.65
PIP80-15C-20	15"	7,681.36

* Tramos de 6.1 mts - Precio por Tramo

Tubo PVC Inglés Riego PIP Azul C/A, CL-125

125 psi / 8.77 Kg/cm2

Código	Medida	Precio Lista
PIP125-6C-20	6"	Cotizar
PIP125-8C-20	8"	Cotizar
PIP125-10C-20	10"	Cotizar
PIP125-12C-20	12"	Cotizar
PIP125-15C-20	15"	Cotizar

* Tramos de 6.1 mts - Precio por metro

* Para diámetros arriba de 15" consulte mínimos de fabricación
 * Tubería Importación sobre pedido, consultar mínimos de compra.



PRESSURE-RATED PIP PIPE


Diamond PIP pressure-rated pipe (6" through 27") is made of compounds conforming to material requirements of SCS 430. The pipe sizes (6" through 27") are made with an integral bell to utilize a gasket for sealing, meeting requirements as defined in ASTM F477 and ASTM 3139.

Diamond PIP pressure-rated PVC pipe meets all the dimensional, chemical and physical requirements as outlined in SCS 430. Diamond PIP pressure-rated pipe (15" through 27") meets all the dimensional, chemical and physical requirements as defined in ASTM D2241 ANNEX.

Each male end shall be beveled, swagged or deburred to facilitate joining and shall be marked to reference proper insertion depth. Only Diamond furnished lubricant is to be used in the joining process.

It is recommended that PIP Pressure-Rated PVC Piping systems be designed and installed in accordance with SCS 430.

RIEBER JOINT ILLUSTRATION

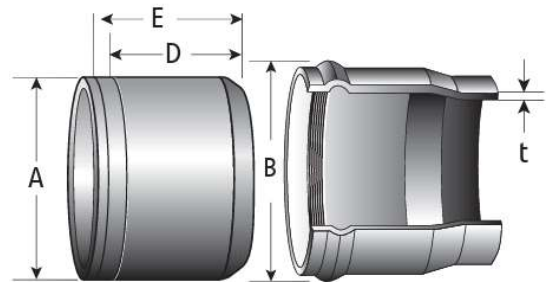

PRESSURE-RATED PIP

ASTM D2241 ANNEX SPECIFICATION DATA. DIAMOND PIP PRESSURE-RATED PVC PIPE IS SUPPLIED IN 22-FOOT LAYING LENGTHS.

Nominal Pipe Size In. (mm)	A Outside Diameter Inches	B Bell Socket Diameter Inches	D Insert Mark 1 Inches	E Insert Mark 2 Inches	SDR-51 80 PSI	SDR-41 100 PSI	SDR-32.5 125 PSI	SDR-26 160 PSI
					(t) Minimum Wall Inches			
6" (150)	6.140	7-1/2"	3-1/2"	4-1/2"	0.120	0.150	0.189	
8" (200)	8.160	10"	3-3/8"	4-3/8"	0.160	0.199	0.251	
10" (250)	10.200	12"	4-3/8"	5-3/8"	0.200	0.249	0.314	
12" (300)	12.240	14"	4-1/4"	5-1/4"	0.240	0.299	0.377	
15" (375)	15.300	17-1/2"	4-3/4"	5-3/4"	0.300	0.373	0.471	0.588
18" (450)	18.701	21-1/2"	7"	8"	0.366	0.456	0.575	0.719
21" (525)	22.047	25-1/4"	7-1/4"	8-1/4"	0.432	0.538	0.678	0.848
24" (600)	24.803	28"	8-1/2"	9-1/2"	0.486	0.605	0.763	0.954
27" (675)	27.953	32-1/2"	8-3/4"	9-3/4"	0.548	0.682	0.860	1.075